



## AV3130

- Sensitivity from 0.01 lux to 100,000 lux
- Frame Rate 20 fps @ Resolution 1,920 x 1,200



Multi-sensor DayNight™ AV3130, the newest addition to MegaVideo™ product line, leverages proprietary patent-pending technology and alleviates the cost and sensitivity shortcomings associated with multi-megapixel video surveillance:

- **ULTRA HIGH RESOLUTION & FULL MOTION:** AV3130 network camera delivers full motion progressive scan 1920 x 1200 video at 20 fps featuring massively-parallel MegaVideo™ image processing architecture capable of sustaining over 6 billion operations per second.
- **SUPERIOR ILLUMINATION RANGE & SENSITIVITY:** While sophisticated conventional cameras improve low-light sensitivity by mechanically removing the IR filter, the AV3130 uses DualBand™ technology that seamlessly switches to optimized monochrome sensor in low light, avoiding sensitivity drop-off due to color filters and small pixels and accommodating 10,000,000:1 range of scene illuminations, from bright sunlight to cloudy moonlight.
- **GREAT COST EFFICIENCY:** Unique AV3130 architecture enables the delivery of HDTV resolution at NTSC price. Power-over Ethernet capability of AV3130 allows the use of just one cable for both data and power transmission, greatly reducing installation costs. As a result the AV3130 represents cost-comparable but vastly superior alternative to analog video.
- **EXCELLENT SYSTEM RELIABILITY & FUNCTIONALITY:** AV3130 has no moving mechanical parts and is complemented by state-of-the art surveillance software capable of live image acquisition and display from multiple cameras, policy-based digital archiving and video redistribution across local and wide area networks.



Day or Night  
MegaVideo® Technology  
Delivers Full Motion  
HDTV Resolution  
at NTSC Price



### AV3130 Camera Specification

#### Imaging

- 1/2" CMOS Image Sensors:
  - 3 Mpixel Color 2040(H) x 1530(V)
  - 1.3 Mpixel Monochrome 1280(H) x 1024(V)
- Bayer mosaic RGB filter
- Sensitivity 0.01 lux @ F1.4
- Dynamic Range 60 dB
- Maximum SNR 45 dB

### Data Transmission


- Data Rate up to 45Mbps
- Video Frame Rate up to:
  - 20 fps @ 1920x1200
  - 30 fps @ 1280x1024
- Motion JPEG with 22 levels of quality
- TFTP Transmission Protocol
- 100Base-TX Ethernet Network Interface

### Programmability

- Auto Day-Night switch from Monochrome to Color
- Auto Exposure (AE) and Gain Control (AGC) >120dB
- Auto Backlight Compensation
- Auto Multi-Matrix White Balance
- 50/60Hz selectable Flicker Control
- Electronic Zoom, Pan & Tilt (PTZ)
- Electronic Image Rotation - up-side down image turn (mirror)
- Resolution windowing down to 32x32 pixels window
- Programmable Motion Blurring Control for Low-Light Mode
- Programmable Resolution, Brightness, Saturation, Gamma, Sharpness, Tint
- Picture-In-Picture: Simultaneous delivery of full field of view and zoomed images

### Electrical

- Power over Ethernet (POE) or DC Input
- Compatible with IEEE 802.3af POE equipment
- 9V – 12VDC (2.1mm x 5.5mm, center positive)
- Power Consumption 4.5 Watts maximum

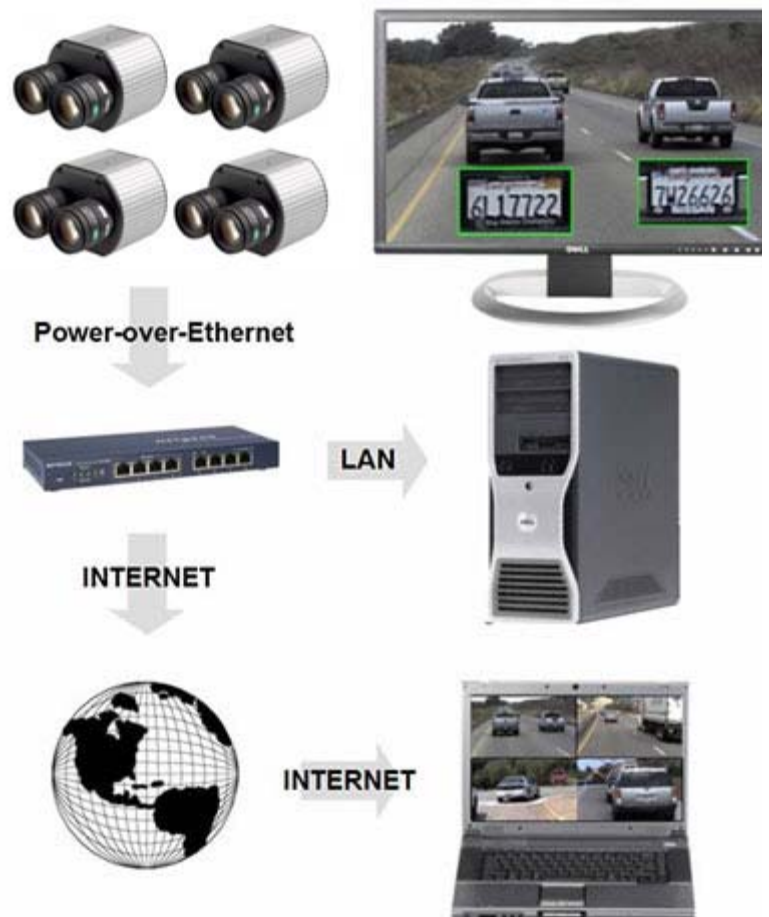

## Regulatory Approvals


- FCC Part 15, Class B
- CE compliant

## Mechanical

- 3"W x 2.5"H x 2.25 "D (w/o lens)
- 1lb or 450 grams (w/o lens)
- Dual C/CS Lens Mount

## Environmental

- Operating Temperature 0°C to +50°C
- Storage Temperature -20°C to +60°C
- Humidity 0% to 90% (non condensing)

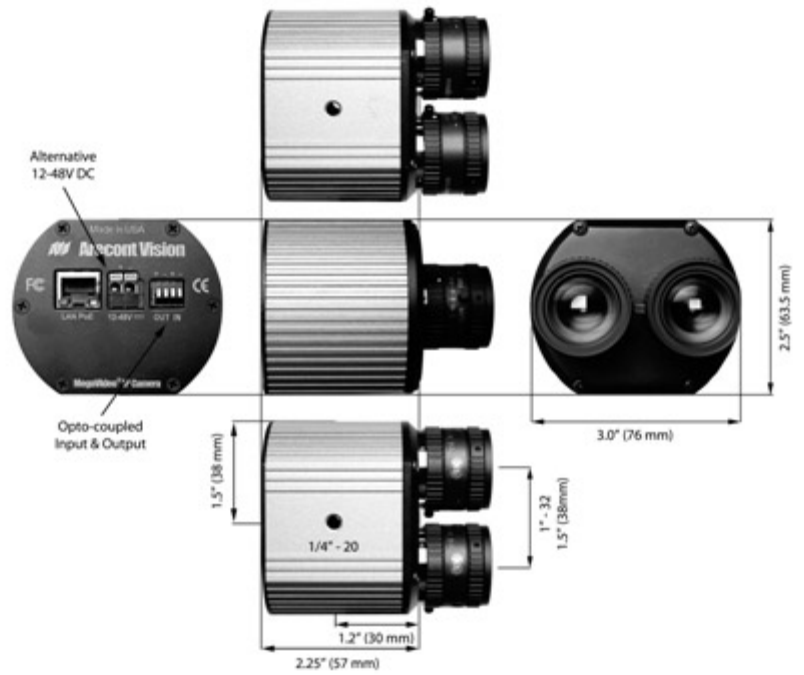

Arecont Vision reserves the right to change products or specifications without notice.



[Image Gallery...](#)

[Video Clips...](#)



[How to Buy...](#)